

ZD-18+ Alarm Module

Safe & secured


Detect and prevent water leaks swiftly

Used for leak detection in small computer rooms or technical service areas, main application areas including: under-floor air conditioning units, over-head fan coil units, hot water radiator units, sump tanks, drip trays, etc.

Allows immediate detection of conductive (water, acid & alkaline) or non-conductive (hydrocarbon fuel or organic solvent) by applying different type of liquid sensing cables.



System Schematic

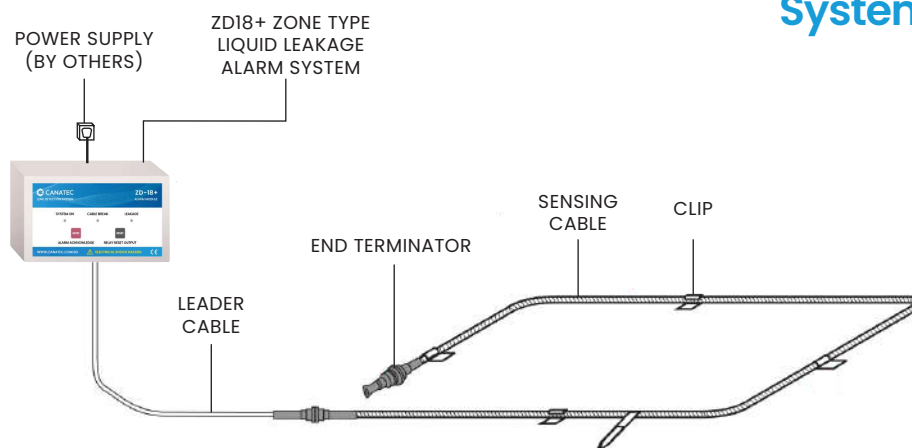

Technical Specifications

Model (ZD-18+)

Enclosure	ABS Enclosure
Weight (g)	550
Width (mm)	165
Depth (mm)	75
Height (mm)	125
(Dimensions exclude cable gland)	

Input Power	Single Phase or 12 -24V AC/DC
Power Consumption (W)	Max 2
Audible Alert	Buzzer with Silent Switch
Relay Output	Leakage Relay (Form C) / Fault Relay (Form C)
Button	Mute / Alarm Acknowledgement / Relay Reset Output
Sensitivity	Adjustable